
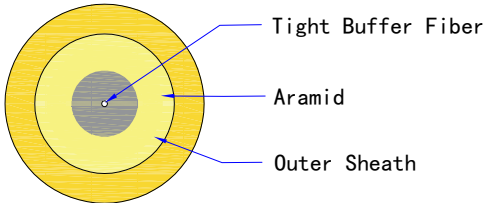


SC/UPC-LC/APC SM SX 2.0mm LSZH Fiber Patch Cord

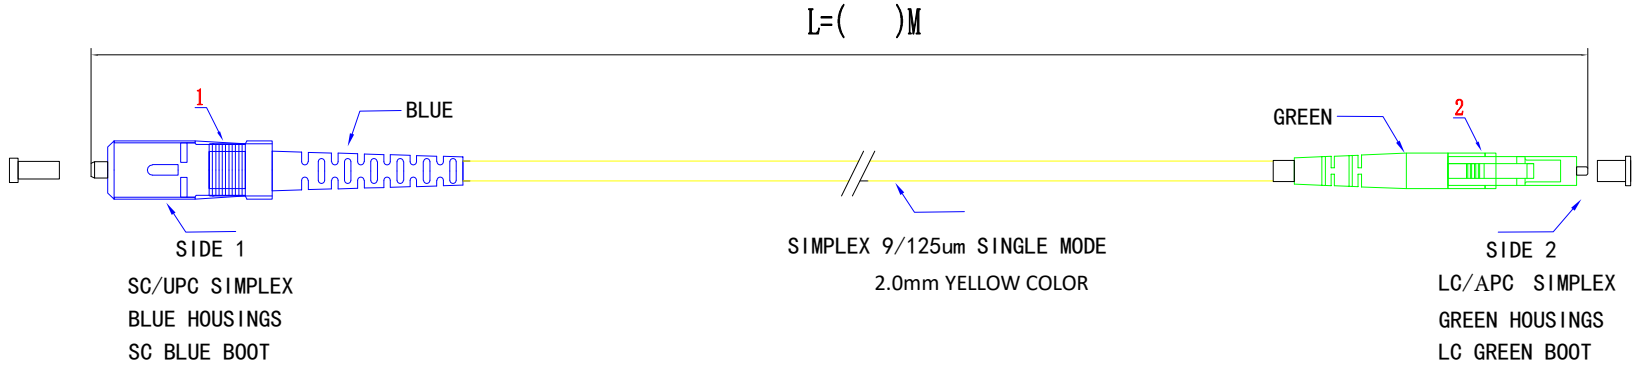

Single core cable

| Specifications:SC/UPC-LC/APC SM SX 2.0mm | |
|--|-------------------|
| Parameters | |
| Operating Wavelength | 1310/1550nm |
| Insertion Loss(IL) | <0.3dB |
| Return Loss(RL) | UPC>50dB,APC>60dB |
| Pperating Temperature | -10~75°C |
| Storage Temperature | -40~85°C |

| NO. | Name | QTY | Unit | Length | Tolerance | PROJECTION: | SC/UPC-LC/APC SM SX 2.0 |
|-----|------------------|-----|------|----------|-----------|-----------------|-------------------------|
| 2 | LC/APC CONNECTOR | 1 | PCS | <1M | +50mm/-0 | DESCRIPTIONS: | |
| 1 | SC/UPC CONNECTOR | 1 | PCS | 1M≤L<5M | +100mm/-0 | PATE NO: | |
| | | | | 5M≤L<30M | +200mm/-0 | DRAWING NO: | |
| | MATERIAL SHEET | | | ≥30 | +1%mm/-0 | | |