

P-60 5G 7003800

H/V SMA

Tehnično navodilo
Tehnično uputstvo
Technical manual



3 831002 907304



50000 0745 030

Montaža : Glejte sliko antene. Vse strešne antene morajo biti pravilno ozemljene.
Montaža : Pogledajte sliko antene. Sve krovne antene moraju biti propisno uzemljene.
Assembly : See a picture of antenna. All outdoor antennas must be fixed and connected properly.

Proizvajalnik / Proizvodi : Iskra, d.o.o., Stegne 21, SI - 1000 Ljubljana, Slovenija
Produce tel./phone: +386 (0) 1 500 44 04 Internet: <http://www.iskra.eu>

Servis: Iskra, d.o.o., Stegne 21, SI - 1000 Ljubljana, Slovenija
Service: tel./phone: +386 (0) 1 500 43 58

Pridržujemo si pravico do sprememb. Pridržavamo pravo promjene. Subject to change without notice.

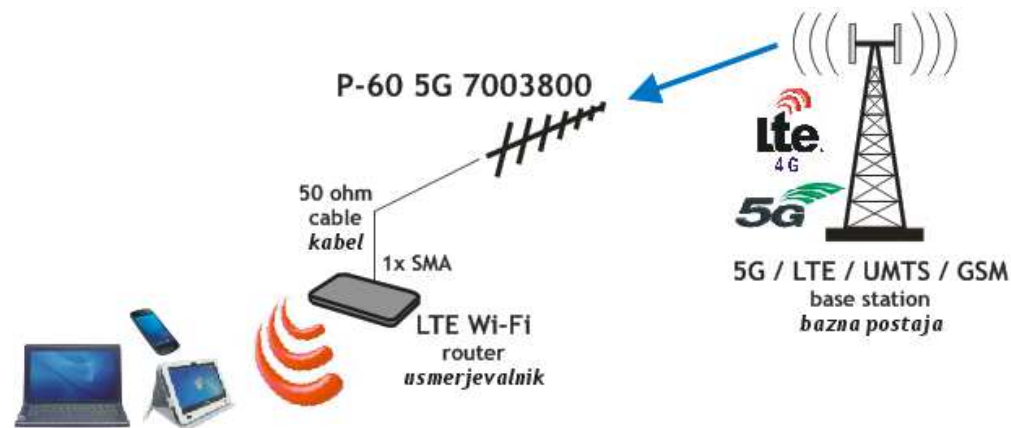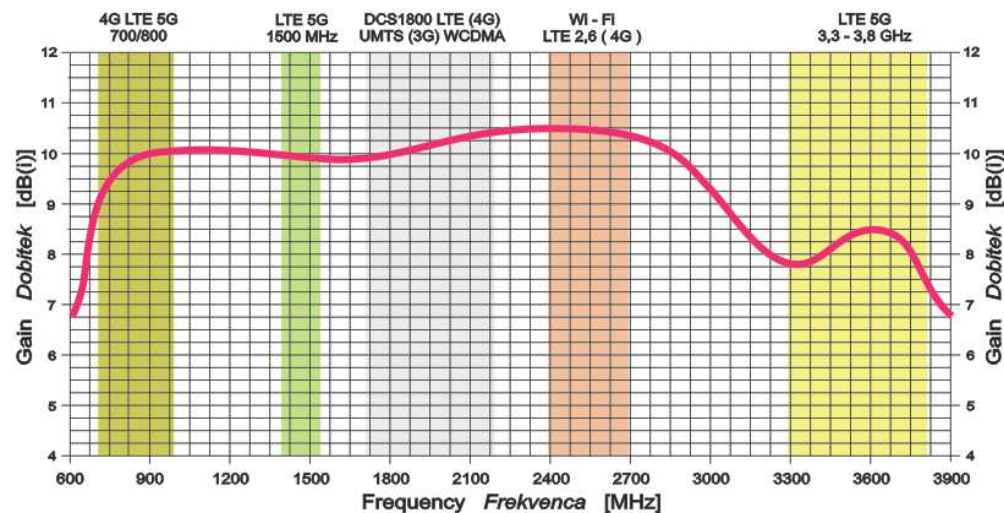

Tehnični podatki / Tehnički podaci / Technical data :

Impedanca	Impedance	50 Ω
Število elementov	Number of elements	60
Kabel	Cable	POPE H155
Dolžina kabla	Cable length	10 m
Konektor	Connector	SMA moški / SMA male
Dolžina antene	Antenna length	110 cm
Frekvenčni pas	Frequency range	LTE 5G 700 + 800 698 - 862 MHz GSM/UMTS/LTE900 (2G/3G/3G+/4G) 880 - 960 MHz LTE 5G 1500 1427-1518 Mhz GSM/LTE 1800 (2G/4G) 1710 - 1880 MHz GSM/LTE 2100 (3G+/4G) 1920 - 2170 MHz WiFi 2,4GHz 2401 - 2495 MHz LTE 2,6GHz 2500 - 2690 MHz LTE 4G+/4G++ LTE Advanced 5G all bands LTE - 5G: 3200 - 3800 MHz
Maks. moč priključitve	Max. power connection	50 Watt
Dobitek	Gain	690 - 960 MHz: 9 - 10 dB(i) 1420 - 1530 Mhz 10 dB(i) 1710 - 2690 MHz: 9,5 - 10,5 dB(i) 3200 - 3800 MHz: 7,5 - 8,5 dB(i)
Razmerje naprej - nazaj	Front - back ratio	23 dB
Širina glavnega lista	Beam width	Horiz. 52° (@ 1800 MHz) Vert. 44° (@ 1800 MHz)
Polarizacija	Polarization	vertikalna / vertical
VSWR	VSWR	< 1,6 : 1
Maks. premer pritrditvenega droga	Max. diameter of support pipe	55 mm