
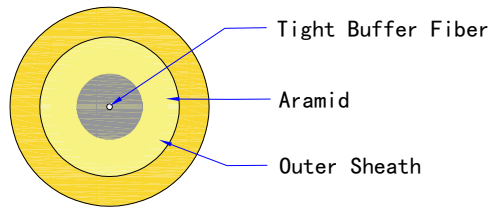


LC/UPC-LC/UPC SM SX 2.0mm LSZH Fiber Patch Cord

L=()M

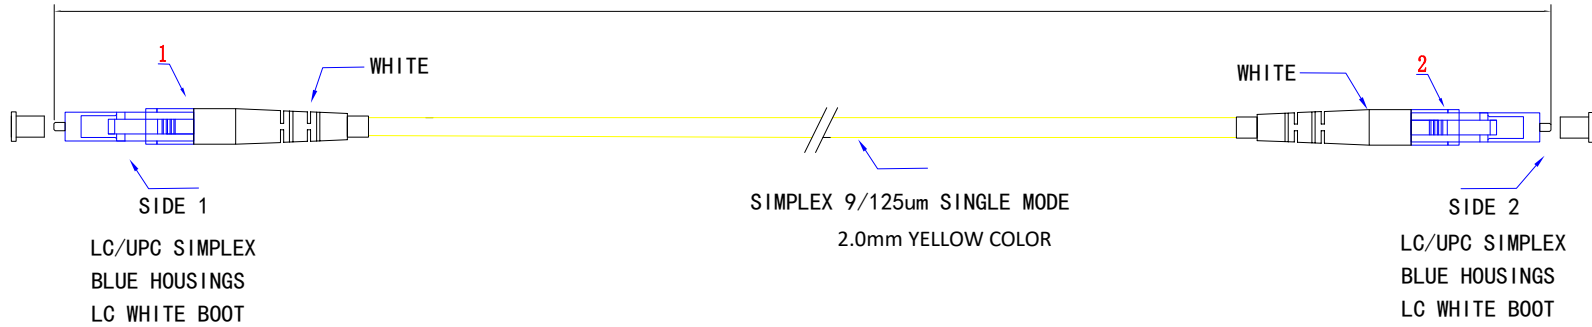

Single core cable

Specifications:LC/UPC-LC/UPC SM SX 2.0mm	
Parameters	
Operating Wavelength	1310/1550nm
Insertion Loss(IL)	<0.3dB
Return Loss(RL)	UPC>50dB,APC>60dB
Pperating Temperature	-10~75°C
Storage Temperature	-40~85°C

NO.	Name	QTY	Unit	Length	Tolerance	PROJECTION: 	LC/UPC-LC/UPC SM SX 2.0
2	LC/UPC CONNECTOR	1	PCS	<1M	+50mm/-0	DESCRIPTIONS:	
1	LC/UPC CONNECTOR	1	PCS	1M≤L<5M	+100mm/-0	PATE NO:	
				5M≤L<30M	+200mm/-0	DRAWING NO:	
MATERIAL SHEET				≥30	+1%mm/-0		