
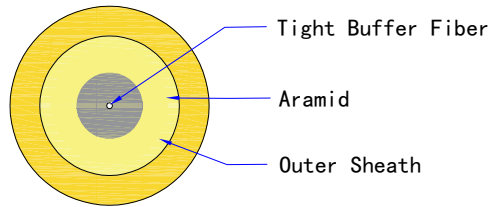


SC/UPC-SC/UPC SM SX 2.0mm LSZH Fiber Patch Cord

L=()M

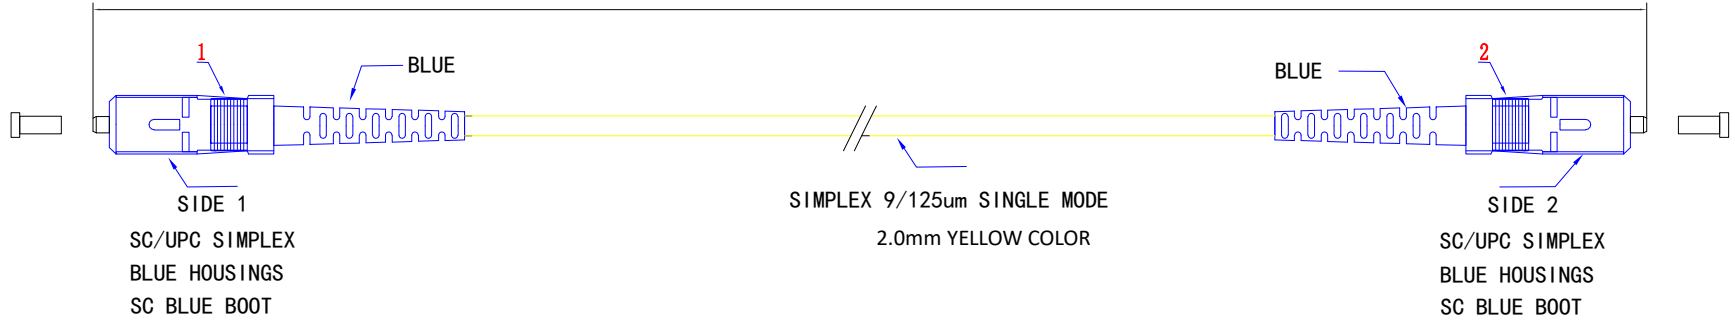

Single core cable

Specifications:SC/UPC-SC/UPC SM SX 2.0mm	
Parameters	
Operating Wavelength	1310/1550nm
Insertion Loss(IL)	<0.3dB
Return Loss(RL)	UPC>50dB,APC>60dB
Pperating Temperature	-10~75°C
Storage Temperature	-40~85°C

NO.	Name	QTY	Unit	Length	Tolerance	PROJECTION: 	SC/UPC-SC/UPC SM SX 2.0
2	SC/UPC CONNECTOR	1	PCS	<1M	+50mm/-0	DESCRIPTIONS: PATE NO: DRAWING NO:	
1	SC/UPC CONNECTOR	1	PCS	1M≤L<5M	+100mm/-0		
				5M≤L<30M	+200mm/-0		
				≥30	+1%mm/-0		
MATERIAL SHEET							